

STANDARD SPECIFICATIONS:




Model BT - Gravity Ball Transfer Table


GRAVITY BALL TRANSFER TABLES

Lengths:	3' and 4'
Overall Widths:	16", 18", 24", 30", 40"
Ball Assembly:	1" dia. sealed and lubricated carbon steel balls. Stud mounted ball assembly, hardened ball cup and zinc-plated protective cover.
Frame:	3-1/2" x 1-1/2" x 10 ga. formed steel channel, bolted frame construction.
Paint:	Uniflo Dark Blue.
Couplings:	Bolt-on butt type.
Capacity:	75 lbs. per ball.


STANDARD SPECIFICATION DRAWINGS:

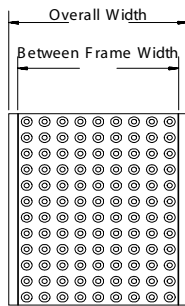

TOP VIEW

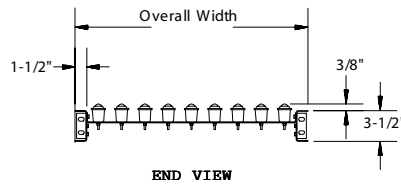

END VIEW

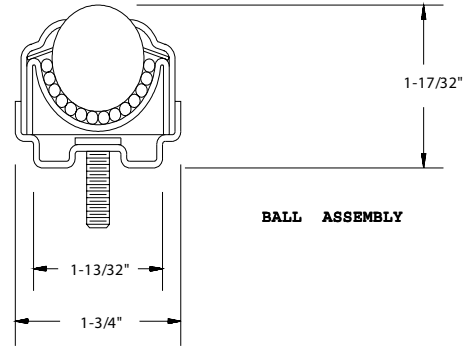

BALL ASSEMBLY

OPTIONAL EQUIPMENT:

Frame Finish: Zinc plated, galvanized.

Ball Assembly:

Ball		Housing	Mounting	Load
Material	Dia.	Finish	Type	Rating
Carbon Steel	1"	Zinc-Plated	Flange	75#
Carbon Steel	1-1/2"	Zinc-Plated	Pipe or Stud	250#
Stainless Steel	1"	SS	Flange	75#
Nylon	1"	Zinc-Plated	Flange	75#
Nylon	1"	Zinc-Plated	Stud	75#
Chrome Steel	1"	Zinc-Plated	Stud	75#
Chrome Steel	1-1/2"	Zinc-Plated	Pipe	250#

Supports: Consult accessories section of this brochure for more details.

Paint: Special colors, powder coat.

WEIGHTS:

Overall Widths	16"	18"	24"	30"	40"
Between Frame Widths	13"	15"	21"	17"	37"
3" Ball Centers (Weight in Lbs.)	24#	24#	26#	37#	44#
6" Ball Centers (Weight in Lbs.)	17#	18#	22#	26#	30#